


Specification sheet

CF 370

FAR 6X2 Rigid, Low Deck, single mounted trailing axle

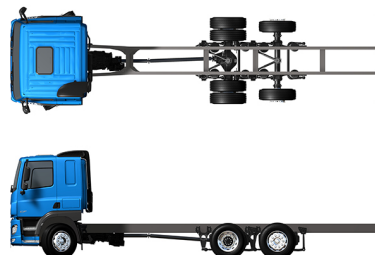

ENGINES

- CF 370 MX-11 (270 kW / 367 hp)
- CF 410 MX-11 (300 kW / 408 hp)
- CF 450 MX-11 (330 kW / 449 hp)
- CF 430 MX-13 (315 kW / 428 hp)
- CF 480 MX-13 (355 kW / 483 hp)
- CF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

25697 kg

Max. front 7500 kg

Max. rear 18197 kg

GCM²⁾

40000 kg

016F8729DAAA - 202217B - 14-01-2022

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Sleeper Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Electrically adjustable mirrors; Front view mirror.

Optional

01899 Day Cab	09983 Fog lights
01137 Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights
08020 LED head lights	

AERODYNAMICS

Optional

06776 Adjustable roof air deflector	04906 Side collars
-------------------------------------	--------------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	09933 Head lamp panel and bumper: Stone Grey
----------------------------------------------	----------------------------------------------

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Pollen filter; Roof hatch aluminium, manual control.

Optional

09271 Steering wheel, leather, colour black	07746 Co-driver seat: Super Air
07240 Steering wheel, leather, Exclusive	07748 Co-driver seat: Xtra Leather Air
07152 Cab interior trim colour Exclusive	00967 Seat belts red
07592 Cab interior decoration Argenta	02117 Third seat
07591 Cab interior decoration Rustica	06539 Refrigerator
07733 Driver seat: Luxury Air	31364 Without feature: Lower bunk mattress
07736 Driver seat: Super Air	06784 Lower bunk mattress Xtra Comfort
07737 Driver seat: Xtra Leather Air	06676 PL light in cab ceiling
07741 Co-driver seat: Comfort Air	06970 Automatic Cab Climate Control
07743 Co-driver seat: Luxury Air	

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph digital, Stoneridge 1C; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: radio, 2x cellular, GNSS; Adaptive Cruise Control with FCW and AEBS-3.

Optional

09681 Preparation for Maut	07261 TruckPhone
08450 Luxury speaker system with 6 speakers	06991 Predictive Cruise Control
07117 Radio/USB player, 2 speakers	

SAFETY AND SECURITY

Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
09828 Front camera system	01725 Reverse warning

SUSPENSION AND AXLES

Front axle load 8.00 t; Rear: 11.50 + 6.70 t, air suspension, SR1344.

Optional

04588 Rear axle SR1347	08191 Axle load monitoring
00751 Rear axle load 11.50+ 7.50 t	

WHEELS AND TYRES

Front axle(s): 315/60R22.5; Driven rear axle(s): 295/60R22.5; Second driven rear or trailing axle: 295/60R22.5; Disc wheels steel, silvergrey; Wheel protection rings silvergrey.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1900 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Engine idle shutdown, 5 minutes; Automated gearbox, TraXon, 12 speeds; Gearbox ratio 16.69-1.00; Rear axle ratio 2.05.

Optional

04523 Manual gearbox, 16 speeds	07103 Automated gearbox, TraXon, 16 speeds
---------------------------------	--------------------------------------------

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921 MX Engine Brake	02715 ZF Intarder
-----------------------	-------------------

CHASSIS

Wheelbase 4.60 m / rear overhang 2.75 m; Side member height 260 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 450 l, height 505 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

07071 Spare wheel carrier right-hand side	03323 Rear light with LEDs
-------------------------------------------	----------------------------

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

07033 Trailer coupling Ringfeder D=13.7	08027 Trailer coupling Rockinger D=20.0
07034 Trailer coupling Ringfeder D=20.0	04624 Closing member
08026 Trailer coupling Rockinger D=13.0	07032 D-value cross member D=20

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | |
|-------------------------------------------------|---------------------------------------------------|
| 04331 Appl connector including air control prep | 02597 Application connector for tail lift control |
| 06692 Application connector chassis | |

POWER TAKE-OFF (PTO)

Optional

- 16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

- | | |
|-------------------------|------------------------------------|
| 06460 Alternator 120 A | 07671 Batteries 2x210Ah AGM C-type |
| 08775 Alternator 150 A | |
| 01257 Batteries 2x140Ah | 06440 Batteries 2x230Ah |

GVM AND GCM

Chassis weight related technical GVM max 26200 kg; Driveline related max GCM 40000 kg class 3.

Optional

- | | |
|--------------------------------------------------|--------------------------------------------------|
| 00200 Driveline related max GCM 38000 kg class 2 | 03675 Driveline related max GCM 50000 kg class 3 |
| 03673 Driveline related max GCM 44000 kg class 2 | |

APPLICATION CONDITIONS

Air intake on the cab roof.

Optional

- 09961 Cyclonic air intake behind the cab

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

Optional



- 08311 Service interval extended



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

CF 370

FAR 6X2 Rigid, Low Deck, single mounted trailing axle

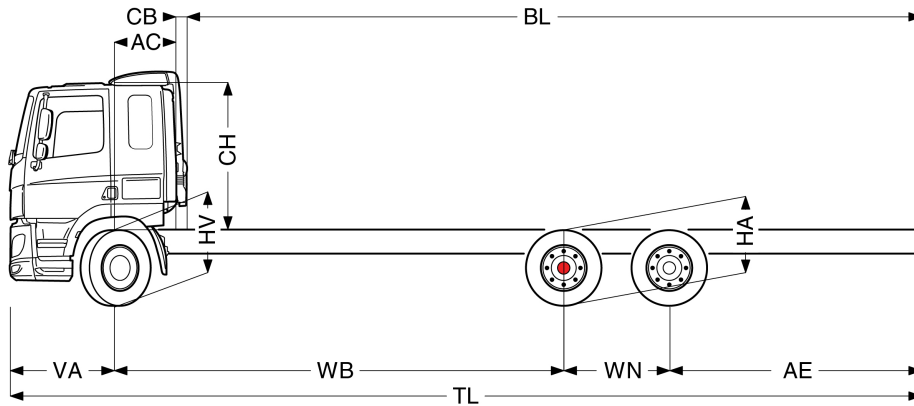

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	4,60	2,75	5106	3194	8300	2394	15003	17398	0,39	0,18	1,99	7,70	7,70	10,12	0,87	0,90	16,91	18,31
	4,80	2,90	5114	3269	8383	2386	14928	17314	0,39	0,18	1,99	8,03	8,03	10,47	0,87	0,90	17,43	18,84
	5,05	2,90	5121	3285	8406	2379	14912	17291	0,39	0,18	1,99	8,47	8,47	10,72	0,87	0,90	18,08	19,50
SLEEPER CAB	4,60	2,75	5160	3202	8362	2340	14995	17335	0,82	0,16	1,99	6,89	6,89	10,12	0,87	0,90	16,90	18,31
	4,80	2,90	5169	3277	8446	2331	14920	17251	0,82	0,16	1,99	7,23	7,23	10,47	0,87	0,90	17,43	18,84
	5,05	2,90	5176	3293	8469	2324	14905	17228	0,82	0,16	1,99	7,67	7,67	10,72	0,87	0,90	18,08	19,50
SPACE CAB	4,60	2,75	5272	3203	8474	2228	14994	17223	0,82	0,16	2,67	6,95	6,95	10,12	0,87	0,90	16,90	18,31
	4,80	2,90	5281	3277	8558	2219	14920	17139	0,82	0,16	2,67	7,30	7,30	10,47	0,87	0,90	17,43	18,84
	5,05	2,90	5288	3293	8581	2212	14904	17116	0,82	0,16	2,67	7,74	7,74	10,72	0,87	0,90	18,08	19,50

OTHER DIMENSIONS VA: 1,37 WN: 1,40 HV¹³⁾: 0,89 HV¹⁴⁾: 0,89 RB: 0,79 SB: 1,82 TB¹⁵⁾: 2,46

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 450 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 6) CB is based on standard air intake and/or exhaust.
 7) Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
 9) Unladen height at centre of driven axle (trailing axle down).
 10) Laden height at centre of driven axle(s).
 11) TK = turning circle between kerbs.
 12) TW = turning circle between walls.
 13) Unladen height at centre of front axle(s).
 14) Laden height at centre of front axle(s).
 15) TB is overall width at rear. (At lower cab step 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.