

# Specification sheet

## XD 370

FAD 8X4 Rigid, Mixer



### ENGINES

- XD NewGen 370 MX-11 (270 kW / 367 hp)
- XD NewGen 410 MX-11 (300 kW / 408 hp)
- XD NewGen 450 MX-11 (330 kW / 449 hp)

### GVM<sup>1)</sup>

32000 kg

Max. front 14200 kg

Max. rear 19000 kg

### GCM<sup>2)</sup>

35500 kg

## OPTION PACKAGES

### Optional

17448 Safety pack                      17595 Executive Pack XD/XF

## CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; DAF Corner View.

### Optional

07018 Sleeper Cab                      00949 LED Skylights; aux. LED lights on cab rf, prepared  
06244 Sleeper High Cab  
07586 Chassis front execution: robust                      01925 Two LED work lamps for cab rear wall  
01226 Cab suspension air                      01891 Hazard beacons on cab front, prepared  
03358 External sun visor                      06629 Two hazard beacon lights  
03922 Fog lights front                      03232 Front windscreen with solar control foil  
00936 Auxiliary LED lights on cab roof, prepared                      03317 Rear window: double glass  
01836 LED Skylights                      07343 Kerb view window co-driver door  
01362 DAF Digital Vision System

## AERODYNAMICS

### Optional

00008 Adj. roof air deflector short Sleeper High Cab                      00082 Adj. roof air deflector for Day Cab  
00124 Adj. rf air defl.long mid >4m(!) Sleeper High Cab                      00097 Adj. roof air deflector for Sleeper Cab  
01538 Adj. roof air defl. long high >4m(!) Sleeper High                      00020 Adj. roof air deflector long low Sleeper High Cab

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

## CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

### Optional

02354 Steering wheel with silver accents                      02117 Third seat  
02355 Steering wheel, leather                      02837 Dashboard table  
02353 Cab interior decoration: Argenta                      03948 Single drawer  
02350 Cab interior decoration: Natura                      03954 Refrigerator  
02838 Foam mattress for lower bunk  
07733 Driver seat: Luxury Air                      02854 Xtra Comfort mattress for lower bunk  
07736 Driver seat: Super Air                      01775 Xtra Comfort mattress with topper for lower bunk  
07737 Driver seat: Xtra Leather Air                      06970 Automatic Cab Climate Control  
09541 Arm rest driver seat  
01740 Arm rest at both sides of the driver seat

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control (ACC) with FCW; Driver Performance Assistant.

### Optional

09681 Preparation for Maut                      09908 Cruise control  
06211 DAF Infotainment System with FM/DAB/DAB+ radio                      08023 Adaptive Cruise Control with FCW and AEBS-3  
03470 DAF Infotainment System: Exclusive, prepared                      06991 Predictive Cruise Control  
01915 DAF Infotainment System: Luxury Plus

## SAFETY AND SECURITY

Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system; No EC-ADR packages; DAF Side & Turn Assist.

### Optional

08631 Air bag (driver) and 2 seat belt tensioners                      00795 Safety regulations EC ADR

## SUSPENSION AND AXLES

Front: 2x 7.10 t, parabolic, 163N; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

## WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P.

### Optional

16152 Tyre makes and types

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 270 kW (367 hp) at 1600 rpm. Maximum torque 1950 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

### Optional

07110 Eco performance                      09638 Off-road applications  
01514 Urge-to-move                      01498 Off-road applications with Rock-free function  
09637 Liquid transport                      03720 No ASR

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

### Optional

09920 No MX Engine Brake                      01497 Park brake control pneumatic with spoken warning  
02715 ZF Intarder  
01572 Park brake control electro -pneumatic                      00929 Driven rear axle with drum brakes

## CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box; Front underrun protection (FUP); Spray suppression.

### Optional

08641 Air tanks aluminium      03323 Rear light with LEDs

16157 Fuel tanks, material and sizes

## DRAWBAR AND TRAILER EQUIPMENT

Closing member.

### Optional

07033 Trailer coupling Ringfeder D=13.7      08027 Trailer coupling Rockinger D=20.0

07034 Trailer coupling Ringfeder D=20.0      04659 Trailer cable EBS

08026 Trailer coupling Rockinger D=13.0

## BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

### Optional

09421 Additional spare wiring      09209 Chassis preparation for mixer application

## POWER TAKE-OFF (PTO)

### Optional

16148 PTO types and positions

## 24V POWER SUPPLY

Alternator 110 A, batteries 2x 140 Ah..

### Optional

04492 Alternator 130 A      07671 Batteries 2x210Ah AGM C-type

08775 Alternator 150 A

08797 Batteries 2x175Ah      06440 Batteries 2x230Ah

## GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

### Optional

01208 Driveline related max GCM 35500 kg class 3

## APPLICATION CONDITIONS

Air intake front.

### Optional

02260 Extra cab insulation      06614 Anti-dust blow-up shield

03648 Cyclonic air intake high

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

08311 Service interval extended

## VEHICLE DELIVERY

Minimum toolkit.

### Optional



07569 Lifting jack



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# XD 370

## FAD 8X4 Rigid, Mixer

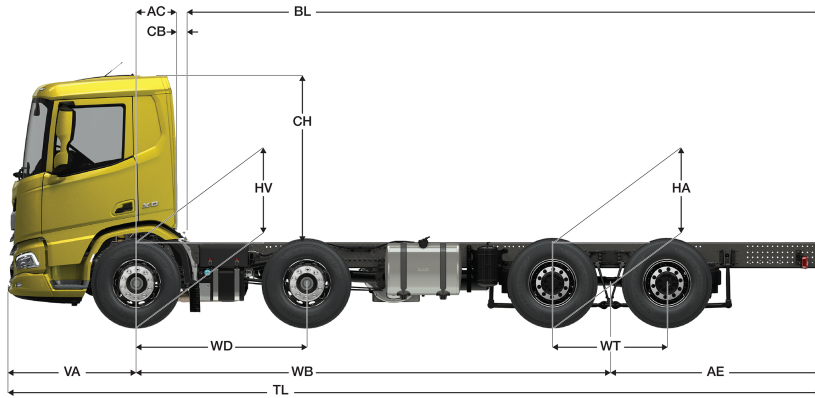

|                  | Wheelbase - AE |                  | Unladen weight <sup>1)</sup> |      |       | Gross Carrying Capacity |       |       | Variable dimensions |                  |      |                  |      |      |                  |                  |                   |                   |
|------------------|----------------|------------------|------------------------------|------|-------|-------------------------|-------|-------|---------------------|------------------|------|------------------|------|------|------------------|------------------|-------------------|-------------------|
|                  | WB             | AE <sup>5)</sup> | Front                        | Rear | Total | Front                   | Rear  | Total | AC                  | CB <sup>6)</sup> | CH   | BL <sup>7)</sup> | BL   | TL   | HA <sup>8)</sup> | HA <sup>9)</sup> | TK <sup>10)</sup> | TW <sup>11)</sup> |
| DAY CAB          | 5,05           | 1,65             | 6689                         | 2557 | 9246  | 7511                    | 16443 | 22754 | 0,50                | 0,07             | 2,01 | 6,31             | 6,73 | 8,23 | 1,16             | 1,09             | 18,39             | 19,70             |
|                  | 5,30           | 1,65             | 6711                         | 2710 | 9421  | 7489                    | 16290 | 22579 | 0,50                | 0,07             | 2,01 | 6,63             | 7,08 | 8,48 | 1,16             | 1,09             | 19,12             | 20,43             |
|                  | 5,70           | 1,65             | 6644                         | 2813 | 9457  | 7556                    | 16187 | 22543 | 0,50                | 0,07             | 2,01 | 7,14             | 7,61 | 8,88 | 1,16             | 1,09             | 20,28             | 21,60             |
| SLEEPER CAB      | 5,05           | 1,65             | 6827                         | 2533 | 9360  | 7373                    | 16467 | 22640 | 0,83                | 0,07             | 2,01 | 5,69             | 6,10 | 8,23 | 1,16             | 1,09             | 18,39             | 19,70             |
|                  | 5,30           | 1,65             | 6847                         | 2688 | 9535  | 7353                    | 16312 | 22465 | 0,83                | 0,07             | 2,01 | 6,01             | 6,46 | 8,48 | 1,16             | 1,09             | 19,12             | 20,43             |
|                  | 5,70           | 1,65             | 6778                         | 2792 | 9570  | 7422                    | 16208 | 22430 | 0,83                | 0,07             | 2,01 | 6,51             | 7,00 | 8,88 | 1,16             | 1,09             | 20,28             | 21,60             |
| SLEEPER HIGH CAB | 5,05           | 1,65             | 6865                         | 2524 | 9389  | 7335                    | 16476 | 22611 | 0,83                | 0,07             | 2,49 | 5,69             | 6,11 | 8,23 | 1,16             | 1,09             | 18,39             | 19,70             |
|                  | 5,30           | 1,65             | 6885                         | 2680 | 9564  | 7315                    | 16320 | 22436 | 0,83                | 0,07             | 2,49 | 6,02             | 6,47 | 8,48 | 1,16             | 1,09             | 19,12             | 20,43             |
|                  | 5,70           | 1,65             | 6815                         | 2785 | 9600  | 7385                    | 16215 | 22400 | 0,83                | 0,07             | 2,49 | 6,52             | 7,01 | 8,88 | 1,16             | 1,09             | 20,28             | 21,60             |

|                  |          |          |          |                          |                          |          |          |                          |
|------------------|----------|----------|----------|--------------------------|--------------------------|----------|----------|--------------------------|
| OTHER DIMENSIONS | VA: 1,53 | WD: 2,05 | WT: 1,40 | HV <sup>12)</sup> : 1,06 | HV <sup>13)</sup> : 0,97 | RB: 0,79 | SB: 1,82 | TB <sup>14)</sup> : 2,48 |
|------------------|----------|----------|----------|--------------------------|--------------------------|----------|----------|--------------------------|

1) GVM in conformity with registration documents.  
 2) GCM in conformity with registration documents.  
 3) Axle load with standard tyre size.  
 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.  
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.  
 6) CB is based on standard air intake and/or exhaust.  
 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).  
 9) Laden height at centre of driven axle(s).  
 10) TK = turning circle between kerbs.  
 11) TW = turning circle between walls.  
 12) Unladen height at centre of front axle(s).  
 13) Laden height at centre of front axle(s).  
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

016F0171ABAA - 202437D - 28-05-2024