

Specification sheet

XFC 410

FAD 8X4 Rigid, Mixer



ENGINES

XFC NewGen 370 MX-11 (270 kW / 367 hp)

XFC NewGen 410 MX-11 (300 kW / 408 hp)

XFC NewGen 450 MX-11 (330 kW / 449 hp)

GVM¹⁾

32000 kg

Max. front 14200 kg

Max. rear 19000 kg

GCM²⁾

35500 kg

016F0279CBAA - 202513D - 11-12-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head and fog lights; Front view mirror.

Optional

07018 Sleeper Cab	01891 Hazard beacons on cab front, prepared
06244 Sleeper High Cab	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
04291 Cab step flexible	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01550 No front view mirror
00949 LED Skylights; aux. LED lights on cab rf, prepared	01362 DAF Digital Vision System
01925 Two LED work lamps for cab rear wall	01913 DAF Corner View

AERODYNAMICS

Optional

01902 Adj. rf air defl. long low >4m(!) XF Sl. High Cab	00082 Adj. roof air deflector for Day Cab
00124 Adj. rf air defl.long mid >4m(!) Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab
01538 Adj. roof air defl. long high >4m(!) Sleeper High	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: grey.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; No arm rest driver seat; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	04070 Two drawers
02355 Steering wheel, leather	03954 Refrigerator
02146 Dashboard finish: Plateau	04050 Refrigerator and drawer
02353 Cab interior decoration: Argenta	04069 Two refrigerators
02350 Cab interior decoration: Natura	02838 Foam mattress for lower bunk
07733 Driver seat: Luxury Air	02854 Xtra Comfort mattress for lower bunk
07736 Driver seat: Super Air	01775 Xtra Comfort mattress with topper for lower bunk
07737 Driver seat: Xtra Leather Air	06970 Automatic Cab Climate Control
02117 Third seat	01967 Park air conditioning, integrated
03948 Single drawer	

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control (ACC) with FCW; Driver Performance Assistant.

Optional

09681 Preparation for Maut	09908 Cruise control
06211 DAF Infotainment System with FM/DAB/DAB+ radio	08023 Adaptive Cruise Control with FCW and AEBS-3
03470 DAF Infotainment System: Exclusive, prepared	06991 Predictive Cruise Control
01915 DAF Infotainment System: Luxury Plus	

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	00795 Safety regulations EC ADP
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 2x 7.10 t, parabolic, 167N; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

WHEELS AND TYRES

Driven rear axle(s): 315/80R22.5; F1,315/80R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/80R22.5GO FMXDE 156/150 L Traction BBA 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

Optional

07110 Eco performance	01498 Off-road applications with Rock-free function
09637 Liquid transport	03720 No ASR
09638 Off-road applications	

BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air h eated dryer..

Optional

02715 ZF Intarder	01497 Park brake control pneumatic with spoken warning
01572 Park brake control electro -pneumatic	00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box; No front underrun protection; Spray suppression.

Optional

08641 Air tanks aluminium	03323 Rear light with LEDs
16157 Fuel tanks, material and sizes	

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN; No pneumatic trailer connection; No electric trailer connection.

Optional

04659 Trailer cable EBS

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

Optional

04492 Alternator 130 A **07671** Batteries 2x210Ah AGM
08775 Alternator 150 A C-type
06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

Optional

01208 Driveline related max
GCM 35500 kg class 3

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation **06614** Anti-dust blow-up shield
03648 Cyclonic air intake high **06620** Anti-dust blow-up shield +
bugscreen

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

08311 Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES



Optional

17448 Safety pack **17625** Climate Pack
17595 Executive Pack XD/XF

Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XFC 410

FAD 8X4 Rigid, Mixer

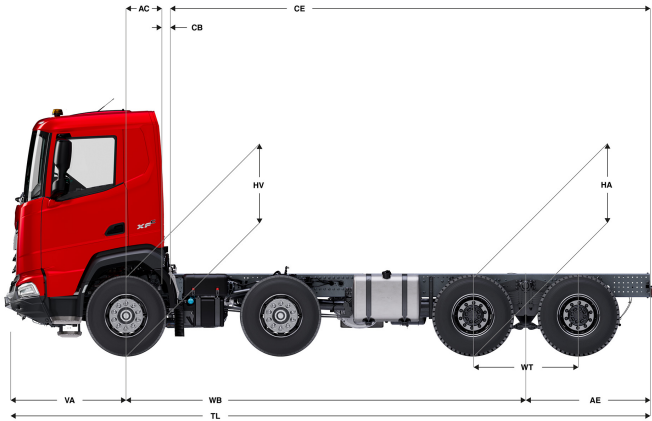

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
DAY CAB	5,05	1,65	7069	2398	9467	7131	16602	22533	0,50	0,07	2,18	6,42	6,84	8,31	1,19	1,13	18,40	19,72
	5,30	1,65	7087	2555	9642	7113	16445	22358	0,50	0,07	2,18	6,74	7,19	8,56	1,19	1,13	19,12	20,46
	5,70	1,65	7015	2664	9679	7185	16336	22321	0,50	0,07	2,18	7,26	7,75	8,96	1,19	1,13	20,28	21,63
SLEEPER CAB	5,05	1,65	7198	2379	9577	7002	16621	22423	0,83	0,07	2,18	5,79	6,21	8,31	1,19	1,12	18,40	19,72
	5,30	1,65	7214	2538	9752	6986	16462	22248	0,83	0,07	2,18	6,12	6,56	8,56	1,19	1,12	19,12	20,46
	5,70	1,65	7141	2647	9788	7059	16353	22212	0,83	0,07	2,18	6,64	7,13	8,96	1,19	1,12	20,28	21,63
SLEEPER HIGH CAB	5,05	1,65	7240	2370	9610	6960	16630	22390	0,83	0,07	2,66	5,81	6,22	8,31	1,19	1,12	18,40	19,72
	5,30	1,65	7256	2529	9785	6944	16471	22215	0,83	0,07	2,66	6,13	6,59	8,56	1,19	1,12	19,12	20,46
	5,70	1,65	7181	2639	9821	7019	16361	22179	0,83	0,07	2,66	6,65	7,14	8,96	1,19	1,12	20,28	21,63

OTHER DIMENSIONS	VA: 1,61	WD: 2,05	WT: 1,40	HV ¹²⁾ : 1,21	HV ¹³⁾ : 1,12	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 6) CB is based on standard air intake and/or exhaust.
 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).
 9) Laden height at centre of driven axle(s).
 10) TK = turning circle between kerbs.
 11) TW = turning circle between walls.
 12) Unladen height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.