

# Specification sheet

# XFC 410

FAD 8X4 Rigid, Mixer



## ENGINES

XFC NewGen 370 MX-11 (270 kW / 367 hp)

XFC NewGen 410 MX-11 (300 kW / 408 hp)

XFC NewGen 450 MX-11 (330 kW / 449 hp)

## GVM<sup>1)</sup>

32000 kg

Max. front 14200 kg

Max. rear 19000 kg

## GCM<sup>2)</sup>

35500 kg

## CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head and fog lights; Front view mirror.

### Optional

<b>07018</b> Sleeper Cab	<b>01891</b> Hazard beacons on cab front, prepared
<b>06244</b> Sleeper High Cab	<b>06629</b> Two hazard beacon lights
<b>03358</b> External sun visor	<b>03232</b> Front windscreen with solar control foil
<b>04291</b> Cab step flexible	<b>03317</b> Rear window: double glass
<b>00936</b> Auxiliary LED lights on cab roof, prepared	<b>07343</b> Kerb view window co-driver door
<b>01836</b> LED Skylights	<b>01550</b> No front view mirror
<b>00949</b> LED Skylights; aux. LED lights on cab rf, prepared	<b>01362</b> DAF Digital Vision System
<b>01925</b> Two LED work lamps for cab rear wall	<b>01913</b> DAF Corner View

## AERODYNAMICS

### Optional

<b>01902</b> Adj. rf air defl. long low >4m(!) XF Sl. High Cab	<b>00082</b> Adj. roof air deflector for Day Cab
<b>00124</b> Adj. rf air defl.long mid >4m(!) Sleeper High Cab	<b>00097</b> Adj. roof air deflector for Sleeper Cab
<b>01538</b> Adj. roof air defl. long high >4m(!) Sleeper High	

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: grey.

## CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; No arm rest driver seat; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

### Optional

<b>02354</b> Steering wheel with silver accents	<b>04070</b> Two drawers
<b>02355</b> Steering wheel, leather	<b>03954</b> Refrigerator
<b>02146</b> Dashboard finish: Plateau	<b>04050</b> Refrigerator and drawer
<b>02353</b> Cab interior decoration: Argenta	<b>04069</b> Two refrigerators
<b>02350</b> Cab interior decoration: Natura	<b>02838</b> Foam mattress for lower bunk
<b>07733</b> Driver seat: Luxury Air	<b>02854</b> Xtra Comfort mattress for lower bunk
<b>07736</b> Driver seat: Super Air	<b>01775</b> Xtra Comfort mattress with topper for lower bunk
<b>07737</b> Driver seat: Xtra Leather Air	<b>06970</b> Automatic Cab Climate Control
<b>02117</b> Third seat	<b>01967</b> Park air conditioning, integrated
<b>03948</b> Single drawer	

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control (ACC) with FCW; Driver Performance Assistant.

### Optional

<b>09681</b> Preparation for Maut	<b>09908</b> Cruise control
<b>06211</b> DAF Infotainment System with FM/DAB/DAB+ radio	<b>08023</b> Adaptive Cruise Control with FCW and AEBS-3
<b>03470</b> DAF Infotainment System: Exclusive, prepared	<b>06991</b> Predictive Cruise Control
<b>01915</b> DAF Infotainment System: Luxury Plus	

## SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; No vehicle stability control; Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>00795</b> Safety regulations EC ADR
<b>02569</b> No Driver State Monitoring	<b>01952</b> No DAF Side/Turn Assist

## SUSPENSION AND AXLES

Front: 2x 7.10 t, parabolic, 167N; Rear axle load 9.50+ 9.50 t; Rear: 19.00 t, trapezium, SR1132T; No lifting device.

## WHEELS AND TYRES

Driven rear axle(s): 315/80R22.5; F1,315/80R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/80R22.5GO FMXDE 156/150 L Traction BBA 3P.

### Optional

**16152** Tyre makes and types

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2150 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2610 OD, 12.92-0.77; Gearbox ratio 12.92-0.77; Rear axle ratio 3.73.

### Optional

<b>07110</b> Eco performance	<b>01498</b> Off-road applications with Rock-free function
<b>09637</b> Liquid transport	<b>03720</b> No ASR
<b>09638</b> Off-road applications	

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air h eated dryer..

### Optional

<b>02715</b> ZF Intarder	<b>01497</b> Park brake control pneumatic with spoken warning
<b>01572</b> Park brake control electro -pneumatic	<b>00929</b> Driven rear axle with drum brakes

## CHASSIS

Wheelbase 5.70 m / rear overhang 1.65 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left below battery box; No front underrun protection; Spray suppression.

### Optional

<b>08641</b> Air tanks aluminium	<b>03323</b> Rear light with LEDs
<b>16157</b> Fuel tanks, material and sizes	

## DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN; No pneumatic trailer connection; No electric trailer connection.

### Optional

04659 Trailer cable EBS

## BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

### Optional

09421 Additional spare wiring      09209 Chassis preparation for mixer application

## POWER TAKE-OFF (PTO)

### Optional

16148 PTO types and positions

## 24V POWER SUPPLY

Alternator 110 A, batteries 2x 175 Ah..

### Optional

04492 Alternator 130 A      07671 Batteries 2x210Ah AGM C-type  
08775 Alternator 150 A      06440 Batteries 2x230Ah

## GVM AND GCM

Chassis weight related technical GVM max 32000 kg; Driveline related max GCM 35500 kg class 2.

### Optional

01208 Driveline related max GCM 35500 kg class 3

## APPLICATION CONDITIONS

Air intake front.

### Optional

02260 Extra cab insulation      06614 Anti-dust blow-up shield  
03648 Cyclonic air intake high

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

08311 Service interval extended

## VEHICLE DELIVERY

Minimum toolkit.

### Optional

07569 Lifting jack

## OPTION PACKAGES

### Optional



17448 Safety pack      17625 Climate Pack  
17595 Executive Pack XD/XF



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# XFC 410

## FAD 8X4 Rigid, Mixer

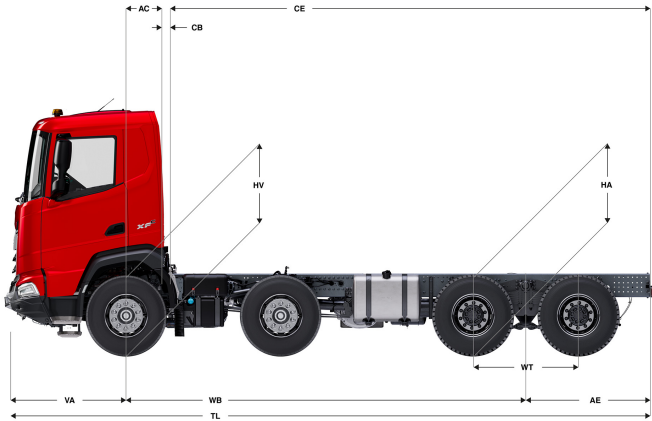

	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions									
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CB <sup>6)</sup>	CH	BL <sup>7)</sup>	BL	TL	HA <sup>8)</sup>	HA <sup>9)</sup>	TK <sup>10)</sup>	TW <sup>11)</sup>
DAY CAB	5,05	1,65	7032	2407	9440	7168	16593	22560	0,50	0,07	2,18	6,41	6,82	8,31	1,19	1,13	18,40	19,72
	5,30	1,65	7050	2564	9615	7150	16436	22385	0,50	0,07	2,18	6,73	7,18	8,56	1,19	1,13	19,12	20,46
	5,70	1,65	6979	2672	9650	7221	16328	22350	0,50	0,07	2,18	7,25	7,74	8,96	1,19	1,13	20,28	21,63
SLEEPER CAB	5,05	1,65	7162	2388	9550	7038	16612	22450	0,83	0,07	2,18	5,78	6,20	8,31	1,19	1,12	18,40	19,72
	5,30	1,65	7179	2546	9725	7021	16454	22275	0,83	0,07	2,18	6,12	6,56	8,56	1,19	1,12	19,12	20,46
	5,70	1,65	7105	2655	9761	7095	16345	22239	0,83	0,07	2,18	6,62	7,12	8,96	1,19	1,12	20,28	21,63
SLEEPER HIGH CAB	5,05	1,65	7204	2379	9582	6996	16621	22418	0,83	0,07	2,66	5,79	6,21	8,31	1,19	1,12	18,40	19,72
	5,30	1,65	7220	2537	9757	6980	16463	22243	0,83	0,07	2,66	6,13	6,58	8,56	1,19	1,12	19,12	20,46
	5,70	1,65	7146	2647	9793	7054	16353	22207	0,83	0,07	2,66	6,64	7,13	8,96	1,19	1,12	20,28	21,63

OTHER DIMENSIONS VA: 1,61 WD: 2,05 WT: 1,40 HV<sup>12)</sup>: 1,21 HV<sup>13)</sup>: 1,12 RB: 0,79 SB: 1,82 TB<sup>14)</sup>: 2,48

1) GVM in conformity with registration documents.  
 2) GCM in conformity with registration documents.  
 3) Axle load with standard tyre size.  
 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.  
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.  
 6) CB is based on standard air intake and/or exhaust.  
 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).  
 9) Laden height at centre of driven axle(s).  
 10) TK = turning circle between kerbs.  
 11) TW = turning circle between walls.  
 12) Unladen height at centre of front axle(s).  
 13) Laden height at centre of front axle(s).  
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.