


# Specification sheet

## XG 450

FT 4X2 Tractor, Low Deck



### ENGINES

XG NewGen 450 MX-11 (330 kW / 449 hp)
XG NewGen 430 MX-13 (315 kW / 428 hp)
XG NewGen 480 MX-13 (355 kW / 483 hp)
XG NewGen 530 MX-13 (390 kW / 530 hp)

### GVM<sup>1)</sup>

18000 kg
Max. front 7500 kg
Max. rear 11500 kg

### GCM<sup>2)</sup>

44000 kg

016GG0309BAAA - 202501H - 18-09-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

### Optional

<b>03358</b> External sun visor	<b>01891</b> Hazard beacons on cab front, prepared
<b>06790</b> Aluminium ladder 1-piece	<b>06629</b> Two hazard beacon lights
<b>06791</b> Aluminium ladder 2-piece	<b>03232</b> Front windscreen with solar control foil
<b>03922</b> Fog lights front	<b>01550</b> No front view mirror
<b>00949</b> LED Skylights; aux. LED lights on cab rf, prepared	<b>01362</b> DAF Digital Vision System
<b>01925</b> Two LED work lamps for cab rear wall	<b>01913</b> DAF Corner View

## AERODYNAMICS

### Optional

<b>01567</b> Adj. roof air deflector; over 4 m (!) for XG cab	<b>04906</b> Side collars, one side hinged
<b>00069</b> Adjustable roof air deflector for XG cab	<b>03074</b> Side collars, both sides hinged

## COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

## CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water); No roof hatch.

### Optional

<b>02355</b> Steering wheel, leather	<b>04069</b> Two refrigerators
<b>02358</b> Steering wheel, leather, Exclusive	<b>02854</b> Xtra Comfort mattress for lower bunk
<b>02043</b> Dashboard finish: Vision	<b>02841</b> Foam mattress for adjustable lower bunk
<b>02353</b> Cab interior decoration: Argenta	<b>01775</b> Xtra Comfort mattress with topper for lower bunk
<b>02350</b> Cab interior decoration: Natura	<b>02858</b> Xtra Comfort mattress for adjustable lower bunk
<b>07733</b> Driver seat: Luxury Air	<b>02860</b> Xtra Comfort mattress + topper for adj. lower bunk
<b>07736</b> Driver seat: Super Air	<b>02380</b> Mattress for DAF Relax Bed
<b>07737</b> Driver seat: Xtra Leather Air	<b>04150</b> Mattress with topper for DAF Relax Bed
<b>02241</b> Driver seat, swivel base	<b>01066</b> Upper bunk
<b>06469</b> Storage compartment with drawer in centre	<b>06970</b> Automatic Cab Climate Control
<b>04070</b> Two drawers	<b>01967</b> Park air conditioning, integrated
<b>04050</b> Refrigerator and drawer	

## COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

### Optional

<b>09681</b> Preparation for Maut	<b>03470</b> DAF Infotainment System: Exclusive, prepared
<b>06211</b> DAF Infotainment System with FM/DAB/DAB+ radio	<b>01915</b> DAF Infotainment System: Luxury Plus

## SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

### Optional

<b>08631</b> Air bag (driver) and 2 seat belt tensioners	<b>00795</b> Safety regulations EC ADR
<b>02178</b> Main switch with second control in the cab	<b>01952</b> No DAF Side/Turn Assist
<b>02569</b> No Driver State Monitoring	

## SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 11.50 t; Rear: air suspension, SR1344.

### Optional

<b>04647</b> Front springs air	<b>08191</b> Axle load monitoring
<b>04588</b> Rear axle SR1347	

## WHEELS AND TYRES

Driven rear axle(s): 315/60R22.5; F1,315/60R22.5GO FMXSE 154/148 L Steering BBB 3P; R1,315/60R22.5GO GFDND 152/148 L Traction BBB 3P.

### Optional

<b>16152</b> Tyre makes and types
-----------------------------------

## DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.38; ASR.

### Optional

<b>07110</b> Eco performance	<b>08371</b> Long Combination Vehicle (LCV)
<b>07101</b> Standard transport, Lite version	<b>09638</b> Off-road applications
<b>09636</b> Heavy haulage	<b>01498</b> Off-road applications with Rock-free function
<b>09637</b> Liquid transport	<b>02843</b> Mechanical differential lock

## BRAKE SYSTEM

MX Engine Brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled aire compressor with automatic air heated dryer..

### Optional

<b>02287</b> Exhaust brake	<b>01572</b> Park brake control electro-pneumatic
<b>02281</b> ZF Intarder	<b>01497</b> Park brake control pneumatic with spoken warning
<b>02304</b> MX Engine Brake and ZF Intarder	<b>04901</b> Spring brake cylinders on the first front axle
<b>02715</b> ZF Intarder	

## CHASSIS

Wheelbase 4.00 m / rear overhang 0.87 m; Side member height 260 mm; Standard component location; 790 l alu fuel tank with step LH, height 580 mm; Tank for AdBlue® 85 l, on left-hand mudguard; Front underrun protection (FUP); Catwalk with step; Rear mudguards; Spray suppression; Work lamp LED.

### Optional

- 16157** Fuel tanks, material and sizes  
**03323** Rear light with LEDs  
**07071** Spare wheel carrier right-hand side

## DRAWBAR AND TRAILER EQUIPMENT

JOST JSK42 cast iron 150+40mm; No lead-up ramps; Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

### Optional

- 03178** Towing hook D= 4.3  
**16151** 5th wheel makes and heights

## BODIES AND PREPARATIONS FOR BODYING

### Optional

- 02811** Tail lift connection Anderson  
**02812** Tail lift connection REMA

## POWER TAKE-OFF (PTO)

### Optional

- 16148** PTO types and positions

## 24V POWER SUPPLY

Alternator 110 A, batteries 2x 230 Ah..

### Optional

- 04492** Alternator 130 A  
**08775** Alternator 150 A  
**07671** Batteries 2x210Ah AGM C-type

## GVM AND GCM

Chassis weight related technical GVM max 19500 kg; Driveline related max GCM 44000 kg class 2.

## APPLICATION CONDITIONS

Air intake front.

### Optional

- 08400** Silent mode  
**02260** Extra cab insulation  
**06614** Anti-dust blow-up shield

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

### Optional

- 08311** Service interval extended

## VEHICLE DELIVERY

Minimum toolkit.

### Optional

- 07569** Lifting jack

## OPTION PACKAGES

### Optional


- 17448** Safety pack  
**17596** Executive Pack XG/XG+  
**17625** Climate Pack



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# XG 450

## FT 4X2 Tractor, Low Deck

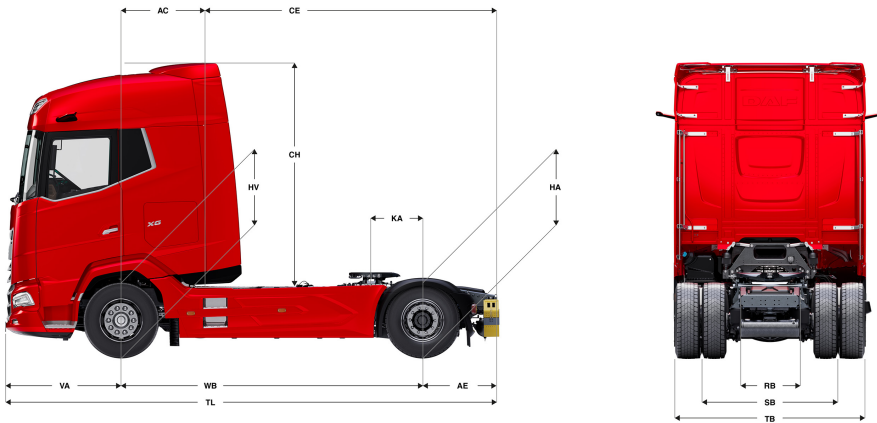

XG CAB	Wheelbase - AE		Unladen weight <sup>1)</sup>			Gross Carrying Capacity			Variable dimensions								
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CE	CH	KA <sup>9)</sup>	TL	HA <sup>7)</sup>	HA <sup>8)</sup>	TK <sup>9)</sup>	TW <sup>10)</sup>
	4,00	0,87	5207	2589	7795	2293	8911	10205	1,16	3,71	2,83	0,62	6,40	0,80	0,80	14,01	15,40

OTHER DIMENSIONS	VA: 1,53	HV <sup>11)</sup> : 0,88	HV <sup>12)</sup> : 0,83	RB: 0,79	SB: 1,82	TB <sup>13)</sup> : 2,48
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.  
 2) GCM in conformity with registration documents.  
 3) Axle load with standard tyre size.  
 4) Chassis and cab weight calculated with: Standard specification items only with 790 litres of fuel, 85 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.  
 5) Other AE dimensions may be available for shown WB.  
 6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).  
 8) Laden height at centre of driven axle(s).  
 9) TK = turning circle between kerbs.  
 10) TW = turning circle between walls.  
 11) Unladen height at centre of front axle(s).  
 12) Laden height at centre of front axle(s).  
 13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.