


Specification sheet

XB 230

FT 4X2 Tractor, 13t



ENGINES

XB NewGen 230 PX-7 (167 kW / 227 hp)

XB NewGen 260 PX-7 (189 kW / 257 hp)

XB NewGen 290 PX-7 (212 kW / 287 hp)

GVM¹⁾

13000 kg

Max. front 4500 kg

Max. rear 9400 kg

GCM²⁾

21000 kg

016G4802AAAA - 202501H - 18-09-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

| | |
|--|--|
| 02576 Extended Day Cab | 07343 Kerb view window co-driver door |
| 02106 Sleeper Cab | |
| 09983 Fog lights | 09282 Mirror brackets, body 2.30-2.40 m |
| 09984 Fog lights and cornering lights | 09283 Mirror brackets, body 2.40-2.50 m |

AERODYNAMICS

Optional

| | |
|---|--|
| 09286 Roof air deflector prepared | 07092 Adjustable roof air deflector low (set) |
| 06776 Adjustable roof air deflector | 09287 Side collars prepared |
| 07109 Adjustable roof air deflector high (set) | 07112 Side collars long (set) |

COLOURS

; Head lamp panel and bumper: Stone Grey; Lower step cover, cab steps and wing Stone Grey.; Chassis colour grey..

Optional

| | |
|---|---|
| 06485 Head lamp panel and bumper: cab colour | 00617 Lower step cover, cab steps and wing in cab colour |
| 00733 Lower step cab colour, cab steps and wing Grey | 16153 Cab and chassis colours |

CAB INTERIOR

Right-hand drive (RHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel; Air conditioning.

Optional

| | |
|---|--|
| 01846 Left-hand drive (LHD) | 03703 Auxiliary cab heater Air Top 2000 |
| 09271 Steering wheel, leather, colour black | 04246 Roof hatch, manual control |
| 03516 Pneumatically adjustable steering column | 04258 Roof hatch, electric control |
| 04346 Lower bunk, normal level | |

COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C version G2V2; Driver Performance Assistant.

Optional

| |
|---|
| 16155 Audio equipment, makes and types |
|---|

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Vehicle Stability Control (VSC); Drive-off Assist.

Optional

| | |
|--|---------------------------------|
| 08631 Air bag (driver) and 2 seat belt tensioners | 01723 No reverse warning |
| 07414 Reverse warning with self-adjusting volume | 16156 EC-ADR packages |

SUSPENSION AND AXLES

Front axle type F60. Parabolic leaf suspension with shock absorbers and stabiliser. Max. load 4.5 tonnes.; Single reduction driven rear axle type SR10.26 with adjustable electronically controlled 2-bellow air suspension, including shock absorbers and stabiliser. Max. load 9.8 tonnes..

WHEELS AND TYRES

Front axle(s): 265/70R19.5; Driven rear axle(s): 265/70R19.5; Goodyear; Wheel protection rings silvergrey.

Optional

| | |
|---|-----------------------------------|
| 06764 Wheel protection rings black | 16152 Tyre makes and types |
|---|-----------------------------------|

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; Manual gearbox, 6 speeds; Gearbox ratio 6.75-0.78; Rear axle ratio 4.56.

Optional

| | |
|---|---|
| 04393 Manual gearbox, 9 speeds | 01878 Rear axle ratio 3.31 |
| 07667 Automatic gearbox PowerLine, 8-speed | 02800 Rear axle ratio 4.10 |
| 02313 Gearbox direct drive | 02843 Mechanical differential lock |

BRAKE SYSTEM

Exhaust brake.

Optional

| |
|--|
| 09525 Park brake ctl with test pos and spoken warning |
|--|

CHASSIS

Wheelbase 3.50 m / rear overhang 0.83 m; Side member height 270 mm; EAS unit right, discharge right rearward; Battery box left, no spare wheel carrier; Plastic fuel tank 170 l; Tank for AdBlue® 30 l, right-hand side chassis; Front underrun protection (FUP); Catwalk with step, extra long; Spray suppression.

Optional

| |
|-----------------------------------|
| 03323 Rear light with LEDs |
|-----------------------------------|

DRAWBAR AND TRAILER EQUIPMENT

Pneumatic trailer connection C-type; Electric connection 24 V / 2x7 pins.

Optional

| | |
|-----------------------------------|---|
| 00271 Towing hook D= 43 kN | 06584 Pneumatic trailer connection palm type |
|-----------------------------------|---|

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

POWER TAKE-OFF (PTO)

Optional

| | |
|--|--------------------------------------|
| 06282 Rear eng PTO 13h, permanent, pump drive | 16148 PTO types and positions |
|--|--------------------------------------|

24V POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional

01897 Alternator 100 A

08797 Batteries 2x175Ah

GVM AND GCM

Chassis weight related technical GVM max 13000 kg; Driveline related max GCM 21000 kg.

Optional

00738 Driveline related max GCM 24000 kg

00620 Driveline related max GCM 28000 kg

02658 Driveline related max GCM 26000 kg

APPLICATION CONDITIONS

Moisture separator, unheated; Air intake high behind cab.

Optional

02270 Cold climate

04767 Moisture separator, heated

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

VEHICLE DELIVERY


Standard toolkit.

Optional

06491 Toolkit Eastern Europe

XB 230

FT 4X2 Tractor, 13t

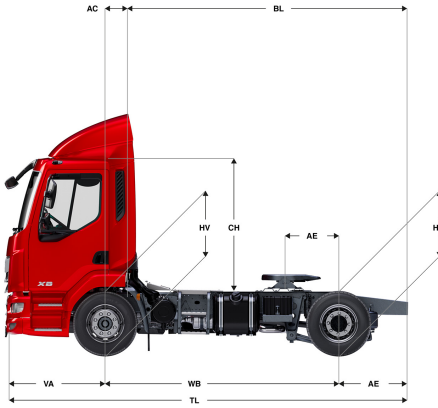

| | Wheelbase - AE | | Unladen weight ¹⁾ | | | Gross Carrying Capacity | | | Variable dimensions | | | | | | | | |
|-------------|----------------|------------------|------------------------------|------|-------|-------------------------|------|-------|---------------------|------|------|------------------|------|------------------|------------------|------------------|-------------------|
| | WB | AE ⁵⁾ | Front | Rear | Total | Front | Rear | Total | AC | CE | CH | KA ⁶⁾ | TL | HA ⁷⁾ | HA ⁸⁾ | TK ⁹⁾ | TW ¹⁰⁾ |
| DAY CAB | 3,13 | 0,83 | 3090 | 1446 | 4537 | 1410 | 7954 | 8463 | 0,27 | 3,69 | 1,88 | 0,00 | 5,30 | 0,94 | 0,92 | 11,08 | 12,29 |
| | 3,50 | 0,83 | 3115 | 1462 | 4577 | 1385 | 7938 | 8423 | 0,27 | 4,06 | 1,88 | 0,00 | 5,67 | 0,94 | 0,92 | 11,99 | 13,22 |
| SLEEPER CAB | 3,13 | 0,83 | 3229 | 1434 | 4664 | 1271 | 7966 | 8336 | 0,67 | 3,29 | 1,88 | 0,00 | 5,30 | 0,94 | 0,92 | 11,08 | 12,29 |
| | 3,50 | 0,83 | 3253 | 1451 | 4704 | 1247 | 7949 | 8296 | 0,67 | 3,66 | 1,88 | 0,00 | 5,67 | 0,94 | 0,92 | 11,99 | 13,22 |

OTHER DIMENSIONS VA: 1,34 HV¹¹⁾: 0,96 HV¹²⁾: 0,83 RB: 0,79 SB: 1,75 TB¹³⁾: 2,35

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 170 litres of fuel, 30 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
 5) Other AE dimensions may be available for shown WB.
 6) Calculate customer specific KA with TOPEC.

7) Unladen height at centre of driven axle(s).
 8) Laden height at centre of driven axle(s).
 9) TK = turning circle between kerbs.
 10) TW = turning circle between walls.
 11) Unladen height at centre of front axle(s).
 12) Laden height at centre of front axle(s).
 13) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.