


# Specification sheet

# LF 150

FA 4X2 Rigid, 08t City Chassis/Bdy



## ENGINES

- LF 150 PX-4 (115 kW / 156 hp)
- LF 170 PX-4 (127 kW / 172 hp)

## GVM<sup>1)</sup>

7500 kg

## GCM<sup>2)</sup>

7500 kg

Max. front 3600 kg

Max. rear 5000 kg

016F2602BAAA - 2021371 - 11-06-2021

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, [www.daf.co.uk](http://www.daf.co.uk)

## CAB EXTERIOR

Day Cab with steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2130 mm.; Electrically adjustable mirrors; Mirror brackets, body 2.50-2.60 m; Front view mirror.

Optional

01174	External sun visor green translucent	09282	Mirror brackets, body 2.30-2.40 m
07343	Kerb view window co-driver door	09283	Mirror brackets, body 2.40-2.50 m
00915	Side no glass / rear single glass		

## AERODYNAMICS

Optional

09287	Side collars prepared	03574	Side collars for aerodynamic body
04906	Side collars	07093	Side collars short (set)

## COLOURS

; Head lamp panel and bumper: Stone Grey; Cab steps and wing Stone Grey; Chassis colour grey..

Optional

06485	Head lamp panel and bumper: cab colour	16153	Cab and chassis colours
01109	Cab steps and wing in cab colour		

## CAB INTERIOR

Right-hand drive (RHD); Mechanically adjustable steering column; Driver seat: air suspended; Co-driver seat: fixed velour; Storage box on engine tunnel.

Optional

01846	Left-hand drive (LHD)	02600	Co-driver seat: air suspended
09271	Steering wheel, leather, colour black	09106	Dual mate seat, luxury version
03516	Pneumatically adjustable steering column	00967	Seat belts red
00072	Dual mate seat, velour	02213	Air conditioning

## COMMUNICATION AND DRIVING MANAGEMENT

FMS connector, prepared; Tachograph digital, Stoneridge 1C; Scale speedometer m/h + km/h; Adaptive Cruise Control with FCW and AEBS-CM2.

Optional

02549	Scale speedometer km/h	16155	Audio equipment, makes and types
01936	Scale speedometer km/h + m/h	07261	TruckPhone

## SAFETY AND SECURITY

Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631	Air bag (driver) and 2 seat belt tensioners	06634	Immobiliser 5 minutes and alarm (SCM BV03-B2)
01725	Reverse warning	06635	Immobiliser 15 minutes and alarm (SCM BV03-B3)
07414	Reverse warning with self-adjusting volume	16156	EC-ADR packages
06633	Immobiliser 5 minutes (SCM BV03-B1)		

## SUSPENSION AND AXLES

Front: 3.60 t, parabolic, F36; Rear: 5.00 t, parabolic, SR5.10.

Optional

01372	Rear springs air	08031	Rear springs parabolic, Heavy Duty
-------	------------------	-------	------------------------------------

## WHEELS AND TYRES

Front axle(s): 215/75R17.5; Driven rear axle(s): 215/75R17.5; Goodyear; Wheel protection rings silvergrey.

Optional

06764	Wheel protection rings black	16152	Tyre makes and types
-------	------------------------------	-------	----------------------

## DRIVELINE

Engine PX-4, 4 cylinder diesel engine, 3.8 litres. Output 115 kW (156 hp) at 2600 rpm. Max. torque 500 Nm at 1200-1900 rpm.; Exhaust emission Euro 6; Manual gearbox, 5 speeds; Gearbox ratio 5.76-0.77; Rear axle ratio 3.73.

Optional

07383	Engine PX-4, 127 kW/172 hp. Cab Badge: 170
-------	--

## BRAKE SYSTEM

Exhaust brake.

## CHASSIS

Wheelbase 3.55 m / rear overhang 1.87 m; Side member height 210 mm; EAS unit right, discharge right rearward; Plastic fuel tank 110 l; Tank for AdBlue® 25 l, right-hand side chassis; Spray suppression.

Optional

02001	Plastic fuel tank 155 l	03323	Rear light with LEDs
02124	Plastic fuel tank 185 l		

## DRAWBAR AND TRAILER EQUIPMENT

Closing member.

## BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

00126	Body attachment BAM 1, consoles type B
-------	--

## ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 125 Ah..

Optional

01897	Alternator 100 A	08797	Batteries 2x175Ah
-------	------------------	-------	-------------------

## GVM AND GCM

Chassis weight related technical GVM max 7500 kg; Driveline related technical GCM equal to GVM.

## APPLICATION CONDITIONS

Moisture separator, unheated; Air intake low.

Optional

04767	Moisture separator, heated	04987	Radiator flyscreen
-------	----------------------------	-------	--------------------

## SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

# VEHICLE DELIVERY



Standard toolkit.



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

# LF 150

FA 4X2 Rigid, 08t City Chassis/Bdy

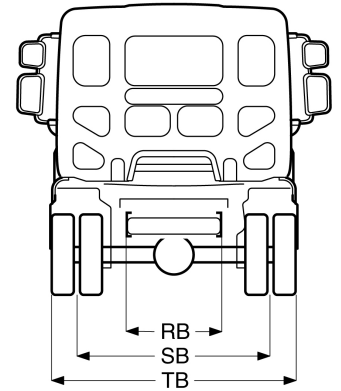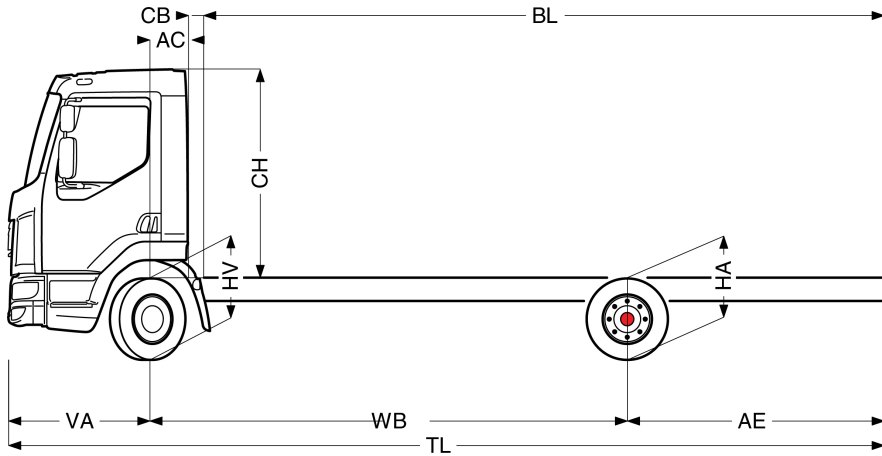

DAY CAB	Wheelbase - AE		Unladen weight <sup>4)</sup>			Gross Carrying Capacity			Variable dimensions									
	WB	AE <sup>5)</sup>	Front	Rear	Total	Front	Rear	Total	AC	CB <sup>6)</sup>	CH <sup>7)</sup>	BL <sup>8)</sup>	BL	TL	HA <sup>9)</sup>	HA <sup>10)</sup>	TK <sup>11)</sup>	TW <sup>12)</sup>
	3,55	1,87	2411	913	3323	1189	4087	4177	0,33	0,13	1,84	4,16	6,03	6,70	0,91	0,78	11,75	13,12
	4,30	2,32	2424	940	3365	1176	4060	4135	0,33	0,13	1,84	5,24	7,52	7,90	0,91	0,78	13,58	14,99
	4,65	2,65	2429	963	3392	1171	4037	4108	0,33	0,13	1,84	5,74	8,22	8,58	0,90	0,78	14,44	15,86

OTHER DIMENSIONS VA: 1,28 HV<sup>13)</sup>: 0,78 HV<sup>14)</sup>: 0,74 RB: 0,86 SB: 1,74 TB<sup>15)</sup>: 2,20

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 110 litres of fuel, 25 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cabin roof hatch.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle(s).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.