

Specification sheet

XG 450

FAW 8X4 Rigid



ENGINES

- XG NewGen 450 MX-11 (330 kW / 449 hp)
- XG NewGen 430 MX-13 (315 kW / 428 hp)
- XG NewGen 480 MX-13 (355 kW / 483 hp)
- XG NewGen 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

- 31000 kg
- Max. front 8000 kg
- Max. rear 23000 kg

GCM²⁾

- 44000 kg

016F0659WAAA - 202437D - 28-05-2024

DAF Trucks Ltd, UK, Haddenham, HP17 8LJ, www.daf.co.uk

OPTION PACKAGES

Optional

- 17448** Safety pack **17625** Climate Pack
17596 Executive Pack XG/XG+

CAB EXTERIOR

Luxurious cab for XG series, with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. The cab interior is extremely comfortable for driving, living and sleeping with unprecedented spaciousness and practical layout. Cab length: 2690 mm; cab width: 2500 mm. Number of cab entrance steps: 3.; Cab suspension mechanical; LED head lights; Front view mirror.

Optional

- 02889** Chassis front execution: no bottom plate **01891** Hazard beacons on cab front, prepared
02952 Chassis front execution: bottom plate aero **06629** Two hazard beacon lights
03358 External sun visor **03232** Front windscreen with solar control foil
03922 Fog lights front **01550** No front view mirror
00949 LED Skylights; aux. LED lights on cab rf, prepared **01362** DAF Digital Vision System
01925 Two LED work lamps for cab rear wall **01913** DAF Corner View

AERODYNAMICS

Optional

- 01562** Adj. roof air deflector; over 4 m (!) for XG cab **00063** Adjustable roof air deflector for XG cab

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Exclusive; Dashboard finish: Plateau; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Arm rest driver seat; Co-driver seat: cinema with fabric cover; Dashboard table; Storage compartment in centre; Luggage carrier; Automatic Temperature Control and airco; Auxiliary cab heater (water); No roof hatch.

Optional

- 02355** Steering wheel, leather **04069** Two refrigerators
02043 Dashboard finish: Vision **02854** Xtra Comfort mattress for lower bunk
02353 Cab interior decoration: Argenta **02841** Foam mattress for adjustable lower bunk
02350 Cab interior decoration: Natura **01775** Xtra Comfort mattress with topper for lower bunk
07733 Driver seat: Luxury Air **02858** Xtra Comfort mattress for adjustable lower bunk
07736 Driver seat: Super Air **02860** Xtra Comfort mattress + topper for adj. lower bunk
07737 Driver seat: Xtra Leather Air **02380** Mattress for DAF Relax Bed
02241 Driver seat, swivel base **04150** Mattress with topper for DAF Relax Bed
06469 Storage compartment with drawer in centre **01066** Upper bunk
04070 Two drawers **06970** Automatic Cab Climate Control
04050 Refrigerator and drawer **01967** Park air conditioning, integrated

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge 1C version G2V2; Speed limiter setting 85/90 km/h; DAF Infotainment Luxury with Luxury speakers; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

- 09681** Preparation for Maut **09908** Cruise control
06211 DAF Infotainment System with FM/DAB/DAB+ radio **09909** Adaptive Cruise Control (ACC) with FCW
03470 DAF Infotainment System: Exclusive, prepared **06991** Predictive Cruise Control
01915 DAF Infotainment System: Luxury Plus **06992** Predictive Cruise Control lite

SAFETY AND SECURITY

DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

- 08631** Air bag (driver) and 2 seat belt tensioners **00795** Safety regulations EC ADP
02569 No Driver State Monitoring **01952** No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 9.00 t, parabolic, 183N; Rear axle load 13.00+13.00 t; Rear: 34.00 t, air suspension, SR1360T; Trailing axle load 8.0t; Lifting device.

Optional

- 06095** Front axle load 10.00 t **08191** Axle load monitoring
07494 Rear axle HR1670T

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; F1,315/80R22.5GO FMXSE 156/150 L Steering BBA 3P; R1,315/70R22.5GO FMXDE 154/150 L Traction BBA 3P; R2,315/70R22.5GO FMXSE 156/150 L Steering BBA 3P.

Optional

- 16152** Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 330 kW (449 hp) at 1600 rpm. Maximum torque 2350 Nm at 900-1125 rpm.; Exhaust emission Euro 6; Eco fuel; 12-speed TraXon 12TX2210 DD, 16.69-1.00; Gearbox ratio 16.69-1.00; Rear axle ratio 2.83.

Optional

- 07110** Eco performance **08371** Long Combination Vehicle (LCV)
02314 Gearbox overdrive **09638** Off-road applications
07101 Standard transport, Lite version **01498** Off-road applications with Rock-free function
09636 Heavy haulage **03720** No ASR
09637 Liquid transport

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Engine driven, water cooled air compressor with automatic air heated dryer.

Optional

- 02715** ZF Intarder
01572 Park brake control electro -pneumatic
01497 Park brake control pneumatic with spoken warning
00929 Driven rear axle with drum brakes

CHASSIS

Wheelbase 4.55 m / rear overhang 1.20 m; Side member height 310 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 45 l, left-hand side chassis; Front underrun protection (FUP); Spray suppression.

Optional

- 16157** Fuel tanks, material and sizes
03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection C-type; Electric connection 24 V / 1x15 pins.

Optional

- 07034** Trailer coupling Ringfeder D=20.0
08026 Trailer coupling Rockinger D=13.0
08027 Trailer coupling Rockinger D=20.0
08908 No towing equipment
06534 No EBS cable

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

- 09421** Additional spare wiring

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

24V POWER SUPPLY

Alternator 130 A, batteries 2x 230 Ah..

Optional

- 08775** Alternator 150 A
07671 Batteries 2x210Ah AGM C-type

GVM AND GCM

Chassis weight related technical GVM max 43000 kg; Driveline related max GCM 61000 kg class 2.

APPLICATION CONDITIONS

Air intake front.

Optional

- 02260** Extra cab insulation
03648 Cyclonic air intake high
06614 Anti-dust blow-up shield

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08311** Service interval extended

VEHICLE DELIVERY

Minimum toolkit.

Optional


- 07569** Lifting jack



Go to [DAF.com](https://www.daf.com) to configure your own perfect DAF.

XG 450

FAW 8X4 Rigid

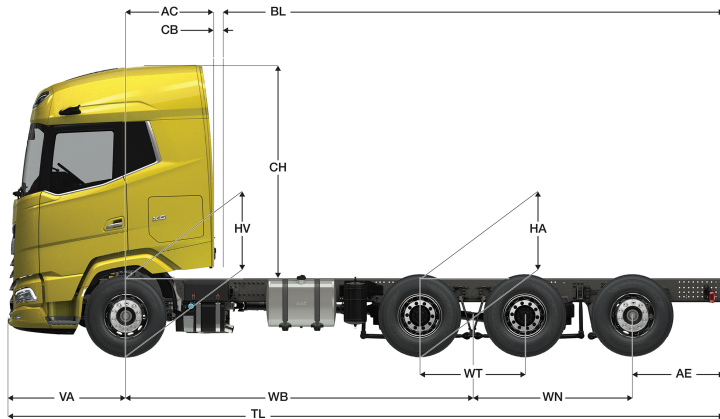

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁸⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH	BL ⁷⁾	BL	TL	HA ⁸⁾	HA ⁹⁾	TK ¹⁰⁾	TW ¹¹⁾
XG CAB	4,05	1,20	5287	4970	10257	2713	18030	20743	1,16	0,07	2,78	5,34	5,34	8,89	1,04	1,01	14,12	15,51
	4,30	2,05	5134	4996	10129	2866	18004	20870	1,16	0,07	2,78	5,69	5,69	9,99	1,04	1,01	14,77	16,17
	4,55	1,20	5376	5089	10465	2624	17910	20535	1,16	0,07	2,78	6,21	6,21	9,39	1,03	1,01	15,42	16,83
	4,90	1,20	5399	5135	10534	2601	17865	20466	1,16	0,07	2,78	6,81	6,81	9,74	1,03	1,02	16,33	17,76
	5,55	1,20	5464	5209	10673	2536	17790	20327	1,16	0,07	2,78	7,93	7,93	10,39	1,03	1,02	18,03	19,48

OTHER DIMENSIONS	VA: 1,53	WT: 1,40	WN: 2,11	HV ¹²⁾ : 1,04	HV ¹³⁾ : 0,99	RB: 0,79	SB: 1,82	TB ¹⁴⁾ : 2,48
------------------	----------	----------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.
 2) GCM in conformity with registration documents.
 3) Axle load with standard tyre size.
 4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 45 litres of AdBlue® and driver of 90 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.
 5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
 6) CB is based on standard air intake and/or exhaust.
 7) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

8) Unladen height at centre of driven axle(s).
 9) Laden height at centre of driven axle(s).
 10) TK = turning circle between kerbs.
 11) TW = turning circle between walls.
 12) Unladen height at centre of front axle(s).
 13) Laden height at centre of front axle(s).
 14) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.